



SELECTOR AND PROGRAMMER FOR QK-CE24WL18

QK-SELDGT is a device designed to work with the control panel. QK-SELDGT works as selector or programmer to change the panel parameters. The keypad can be locked and unlocked with a simple procedure and in any case it will lock after 30 sec. of non-use. The selector allows you to scroll through the six positions. Programming parameters are password protected. The reset button allows the remote reset.

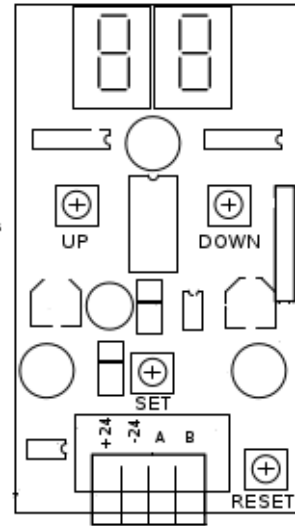

1 WIRINGS

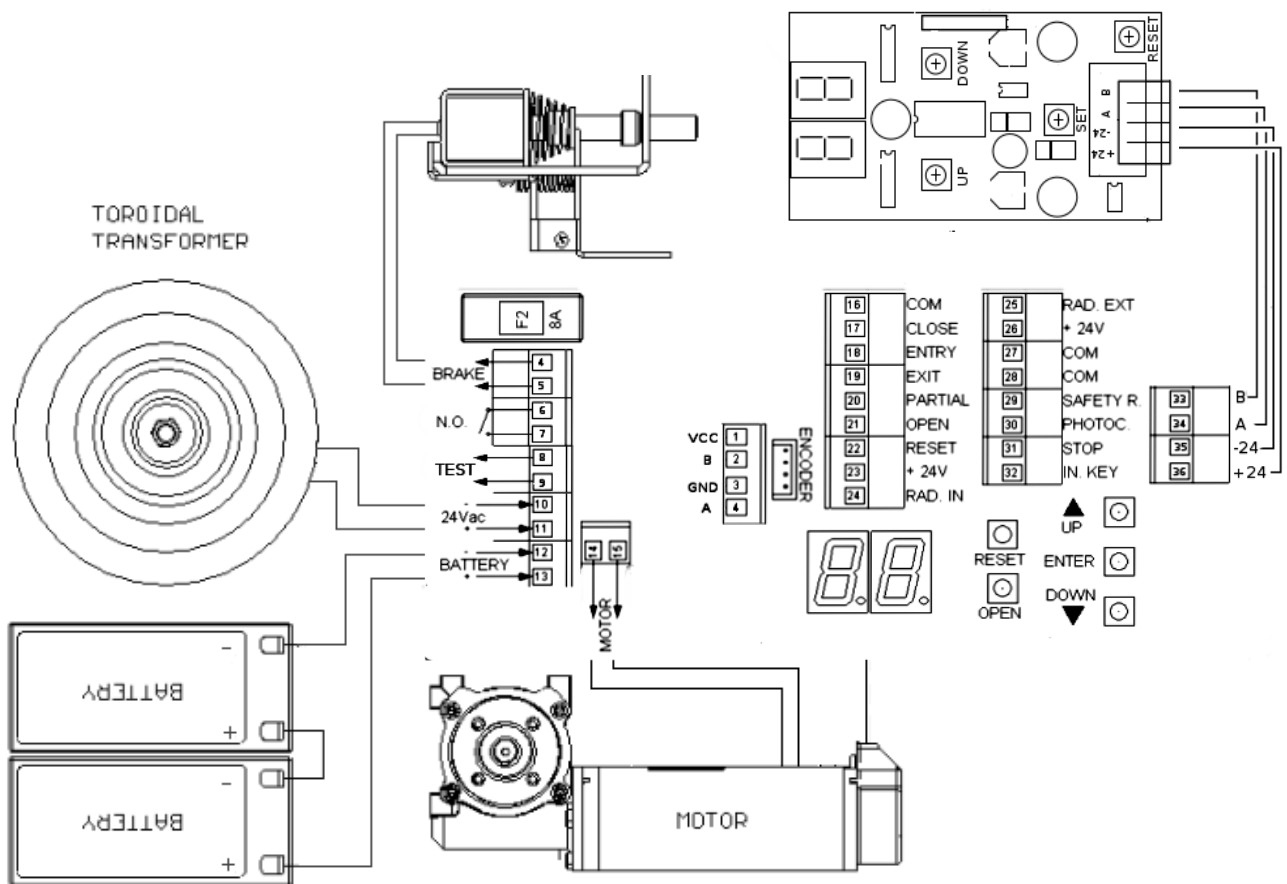

2**SELECTOR**

Press UP or DOWN to scroll through the six selector positions: AUTO (flashing dash), PARTIAL($P\bar{P}$), OPEN($\bar{O}P$), ENTRY($\bar{E}n$), CLOSED($\bar{L}L$), OUT($\bar{O}t$).

3**PROGRAMMER**

To enter in programming mode press and release the SET button. Enter the password to go in basic menu or enter the password to go in detailed menu. See the control board manual for programming and parameters details.

4**LOCK / UNLOCK**

To lock the keyboard keep down SET button until the display shows two fixed dashes.

To unlock the keyboard keep down SET button until the display flash.

The control board automatically locks after 30 sec. of non-use.

When the control board is locked, you can not see any alarms. To see the alarms, unlock the control board.

5**RESET**

Press RESET button to reset DIGITAL SELECTOR and door CONTROL BOARD.

The reset key is also active when the card is locked.

6**ERROR**

The appearance of the fixed word " $\bar{E}r$ " indicates a communication problem with the motherboard.

Check wiring between motherboard and selector.

**UNI
EN**

Our products if installed by qualified personnel capable to evaluate risks, comply with norms UNI EN 12453, EN 12445



www.quikoitaly.com